

Housing Devices, Inc.


ADA 1000® Phone Line Emergency Call System

STANDARD FEATURES:

- Vandal Proof 16 gauge Stainless Steel Construction with engraved lettering
- Only two wire telephone line and AC power need for installation
- Automatic Dialer with programmable 31 Digit Dialer Memory
- Two Phone Number dial out capability
- 5 station capability on one telephone line
- Hands Free Speaker Phone
- Large 3" Stainless Steel engraved "PUSH FOR HELP" Button
- Automatic detection of called party's voice operation
- Automatic or Manual Shut Off by called party (depends on phone service)
- Variable Conversation time capable
- Field and Remote Programmable with programming error indicator
- Field Programmable without telephone line or 110 VAC connection
- Visual Alarm for the Hearing Impaired
- Recordable station location identifier message (up to 18 seconds)
- Programmable "Shut Off" Time (1-to 999 Minutes)
- PBX and Central Office lines capable
- 110 VAC powered with power indicator
- Battery Back-up with 5 Year battery life

OPTIONAL FEATURES:

- Polished or Brushed Brass Construction
- Weather Hood (Stainless Steel or Brass)
- Goose Neck Mounting Pole
- Engraved Braille Signs
- Custom Sizes Available
- Illuminated "Area of Rescue" Assistance Signs with or without Battery Back-Up
- Momentary Dry Contacts

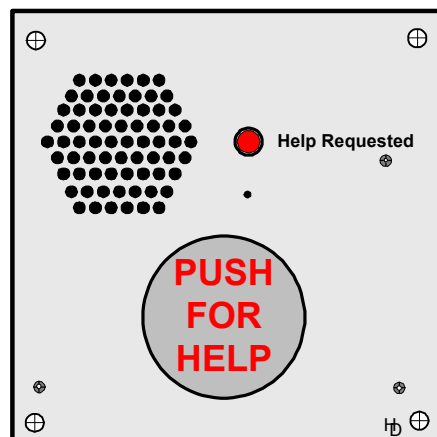

DESCRIPTION:

The ADA 1000 Emergency Phone System provides hands-frees audio and visual alarms to users and complies with the Americans with Disabilities Act. Installation is easily accomplished with connections to a telephone line and AC power. In the event of a power failure the ADA 1000 has an independent battery backup system.

SYSTEM OPERATION:

Depressing the "PUSH FOR HELP" button on an ADA1000 places the system in "Help Requested" mode, illuminates the red "Help Requested" LED on the unit, and instructs the system to dial out to the first of two emergency phone numbers (previously programmed during installation).

Contact is established when the "called party" picks up the handset on their telephone. This causes the red LED to "flash" indicating that a connection to the called party has been made. The ADA 1000 then uses a pre-recorded message to announce its location twice & automatically establish hands free two way communications with the caller.

Termination of the call may automatically happen upon the called party's hanging up of the handset if the telephone company has provisions for WINK services. Manual termination of the call is accomplished by the called party pressing the * & # keys at the same time on their telephone's keypad.